



**UNI-ROYAL**  
厚聲集團

# DATA SHEET

**Product Name** Wire -Wound Non-inductive Film Fixed Resistors

---

**Part Name** KNPI Series

**File No.** DIP-SP-011

## **Uniroyal Electronics Global Co., Ltd.**

88#, Longteng Road, Economic & Technical Development Zone, Kunshan, Jiangsu, China

Tel +86 512 5763 1411 / 22 /33

Email [marketing@uni-royal.cn](mailto:marketing@uni-royal.cn)

Manufacture Plant Uniroyal Electronics Industry Co., Ltd.

Aeon Technology Corporation

Royal Electronic Factory (Thailand) Co., Ltd.

Royal Technology (Thailand) Co., Ltd.

## 1. Scope

- 1.1 This datasheet is the characteristics of Wire -Wound Non-inductive Film Fixed Resistors manufactured by UNI-ROYAL
- 1.2 Excellent flame retardant coating
- 1.3 too low or too high ohmic value can be supplied on a case to case basis
- 1.4 Non-inductive production process

## 2. Part No. System

The standard Part No. includes 14 digits with the following explanation:

- 2.1 Non-Inductive Wire-Wound Fixed Resistors type, the 1<sup>st</sup> to 3<sup>rd</sup> digits are to indicate the product type and 4th digit is the special feature.

Example: KNPI= Non-Inductive Wire-Wound Fixed Resistors

- 2.2 5<sup>th</sup>~6<sup>th</sup> digits:

- 2.2.1 This is to indicate the wattage or power rating. To dieting the size and the numbers,

The following codes are used; and please refer to the following chart for detail:

W=Normal Size; S=Small Size; “1”~“G”to denotes “1”~“16”as Hexadecimal:

1/16W~1/2W (< 1W )

Wattage	1/2	1/3	1/4	1/5	1/6	1/8	1/10	1/16
Normal Size	W2	W3	W4	W5	W6	W8	WA	WG
Small Size	S2	S3	S4	S5	S6	S8	SA	SG

1W~16W ( $\geq 1W$ )

Wattage	1	2	3	5	7	8	9	10	15
Normal Size	1W	2W	3W	5W	7W	8W	9W	AW	FW
Small Size	1S	2S	3S	5S	7S	8S	9S	AS	FS

- 2.2.2 For power rating less than 1 watt, the 5th digit will be the letters W, or S to represent the size required & the 6th digit will be a number or a letter code.

Example: WA=1/10W;

- 2.2.3 For power of 1 watt to 16 watt, the 5th digit will be a number or a letter code and the 6th digit will be the letters of W or S.

Example: AW=10W; 3S=3W-S

- 2.3 The 7<sup>th</sup> digit is to denote the Resistance Tolerance. The following letter code is to be used for indicating the standard Resistance Tolerance.

F=±1% G=±2% J=±5% K= ±10%

- 2.4 The 8<sup>th</sup> to 11th digits is to denote the Resistance Value.

- 2.4.1 For the standard resistance values of E-24 series, the 8th digit is “0”, the 9<sup>th</sup> & 10<sup>th</sup> digits are to denote the significant figures of the resistance and the 11<sup>th</sup> digit is the number of zeros following.;

For the standard resistance values of E-96 series, the 8<sup>th</sup> digit to the 10th digits is to denote the significant figures of the resistance and the 11<sup>th</sup> digit is the 11<sup>th</sup> digit is the zeros following.

- 2.4.2 The following number s and the letter codes are to be used to indicate the number of zeros in the 11<sup>th</sup> digit:

0=10<sup>0</sup> 1=10<sup>1</sup> 2=10<sup>2</sup> 3=10<sup>3</sup> 4=10<sup>4</sup> 5=10<sup>5</sup>  
 6=10<sup>6</sup> J=10<sup>-1</sup> K=10<sup>-2</sup> L=10<sup>-3</sup> M=10<sup>-4</sup>

- 2.4.3 The 12<sup>th</sup>, 13<sup>th</sup> & 14<sup>th</sup> digits.

The 12<sup>th</sup> digit is to denote the Packaging Type with the following codes:

A=Tape/Box (Ammo pack) B=Bulk/Box  
 T=Tape/Reel P=Tape/Box of PT-26 products

- 2.4.4 The 13<sup>th</sup> digit is normally to indicate the Packing Quantity of Tape/Box & Tape/Reel packaging types. The following letter code is to be used for some packing quantities:

A=500pcs B=2500pcs C=10000pcs  
 D=20000pcs G=25000pcs H=50000pcs

- 2.4.5 For the FORMED type products, the 13<sup>th</sup> & 14<sup>th</sup> digits are used to denote the forming types of the product with the following letter codes:


MF=M-type with flattened lead wire F0= F-type  
 MK= M-type with kinked lead wire F1= F1-type  
 ML= M-type with normal lead wire F2= F2-type  
 MC= M-type with bending lead wire F3= F3-type

- 2.4.6 For some items, the 14<sup>th</sup> digit alone can use to denote special features of additional information with the following codes:

P=Panasert type 1=Avisert type 1 2=Avisert type 2  
 3=Avisert type 3 A=Cutting type CO 1/4W-A type B= Cutting type CO 1/4W-B type


**3. Ordering Procedure**

(Example: KNPI 2W ±5% 100Ω T/B-1000 )

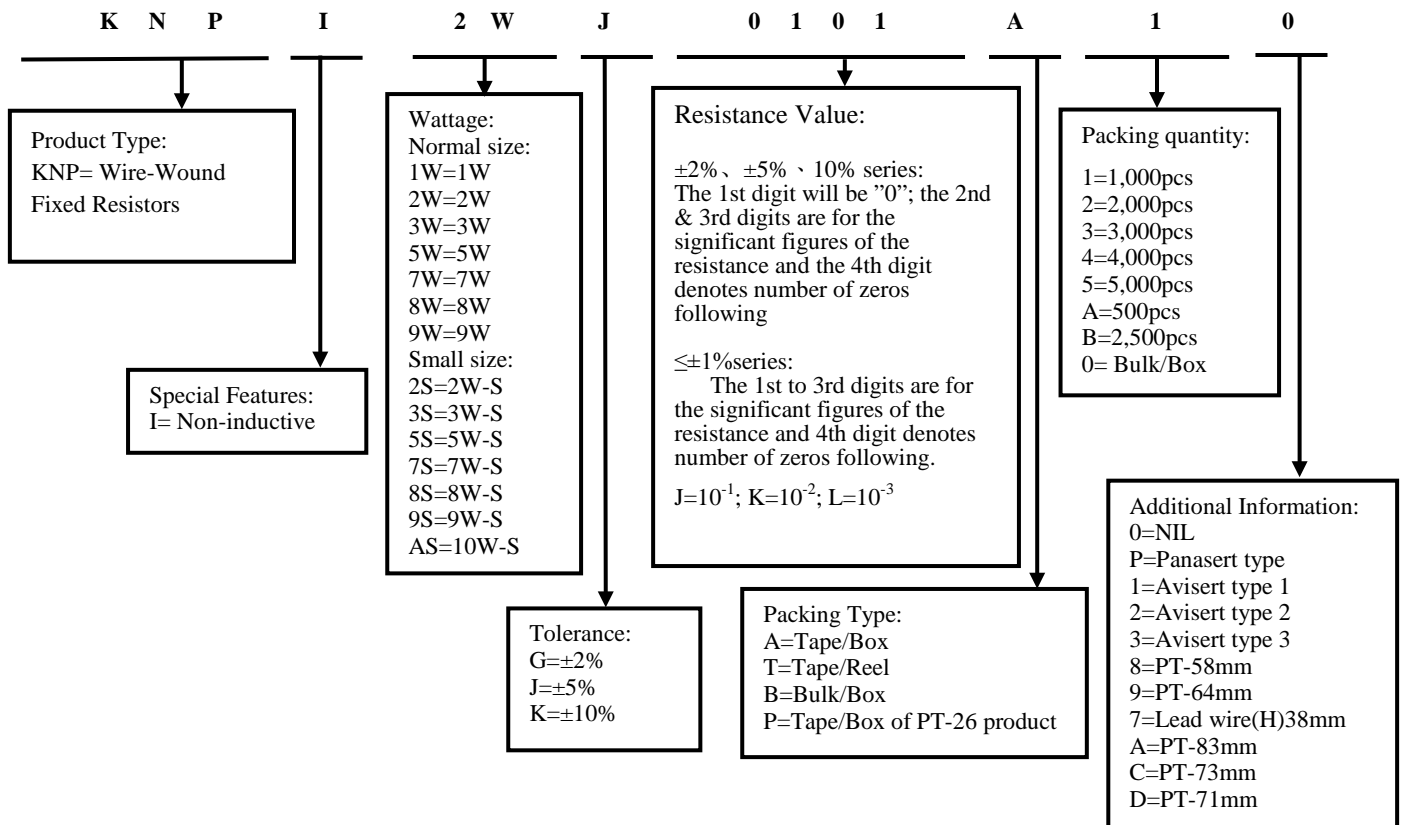

**4. Marking**

Resistors shall be marked with color coding  
 Colors shall be in accordance with JIS C 0802

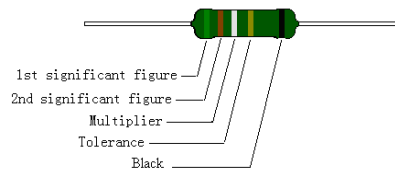


**4.1 Label:**


Label shall be marked with following items:

- (1) Type and style
- (2) Nominal resistance
- (3) Resistance tolerance
- (4) Quantity
- (5) Lot number
- (6) PPM

**Example:**

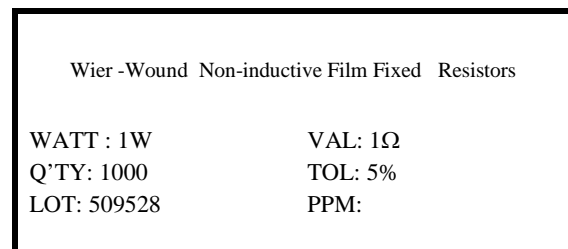

**5. Ratings & Dimension**

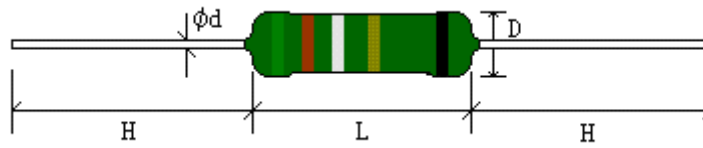


2.1 Normal size

Type	Dimension(mm)					Tolerance	Resistance Range
	D±1	L±1	d±0.05	H±3	PT		
KNPI 1/2W	3.0	9.5	0.54	28	52	±2%、±5%、±10%	0.01Ω~30Ω
KNPI 1WS	3.0	9.5	0.54	28	52	±2%、±5%、±10%	0.01Ω~30Ω
KNPI 1W	4.0	11.5	0.70	25	52	±2%、±5%、±10%	0.01Ω~62Ω
KNPI 2WS	4.0	11.5	0.70	25	52	±2%、±5%、±10%	0.01Ω~62Ω
KNPI 2W	5.5	15.5	0.70	28	64	±2%、±5%、±10%	0.018Ω~120Ω
KNPI 3WS	5.5	15.5	0.70	28	64	±2%、±5%、±10%	0.018Ω~120Ω
KNPI 3W	6.5	17.5	0.75	28	64	±2%、±5%、±10%	0.024Ω~150Ω
KNPI 5WS	6.5	17.5	0.75	28	64	±2%、±5%、±10%	0.024Ω~150Ω
KNPI 5W	8.5	24.5	0.75	38	90	±2%、±5%、±10%	0.043Ω~430Ω
KNPI 7WS	8.5	24.5	0.75	38	90	±2%、±5%、±10%	0.043Ω~430Ω
KNPI 7W	8.5	29.5	0.75	38	B/B	±2%、±5%、±10%	0.047Ω~430Ω
KNPI 8WS	8.5	29.5	0.75	38	B/B	±2%、±5%、±10%	0.047Ω~430Ω
KNPI 8W	8.5	39.5	1.00	38	B/B	±2%、±5%、±10%	0.091Ω~620Ω
KNPI 9WS	8.5	39.5	1.00	38	B/B	±2%、±5%、±10%	0.091Ω~620Ω
KNPI 9W	8.5	52.5	1.00	38	B/B	±2%、±5%、±10%	0.13Ω~820Ω
KNPI 10WS	8.5	52.5	1.00	38	B/B	±2%、±5%、±10%	0.13Ω~820Ω

**6. Derating Curve**

Resistors shall have a power rating based on continuous load operation at an ambient temperature from -55°C to 70°C. For temperature in excess of 70°C, the load shall be derate as shown in figure 1

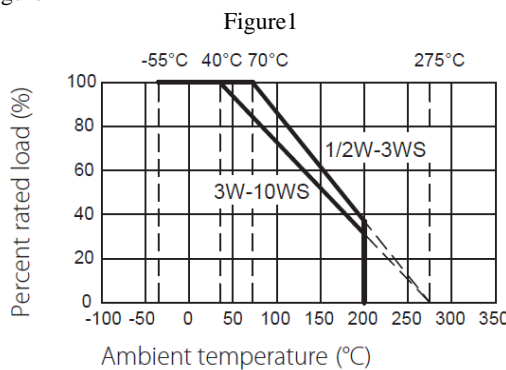

6.1 Voltage rating:


Resistors shall have a rated direct-current (DC) continuous working voltage or an approximate sine-wave root-mean-square (RMS) alternating-current (AC) continuous working voltage at commercial-line frequency and waveform corresponding to the power rating, as determined from the following formula:  $RCWV = \sqrt{P \times R}$

Where: RCWV = rated dc or RMS ac continuous working voltage at commercial-line frequency and waveform (VOLT.)

P = power rating (WATT.) R = nominal resistance (OHM)

The overload voltage is 2.5 times RCWV or Max. Overload voltage whichever is less.

## 7. Structure

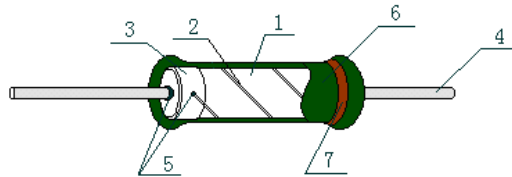

No.	Name	Raw materials
1	Basic body	Rod Type Ceramics
2	Resistor	Ni-Cr Alloys
3	End cap	Steel (Tin Plated iron Surface)
4	Lead wire	Tin solder coated copper wire
5	Joint	By welding
6	Coating	Insulated Resin Color: Deep Green (Normal size) Light Green (Small size)
7	Marking	Epoxy Resin


## 8. Performance Specification

Characteristic	Limits	Test Methods (GB/T5729&JIS-C-5201&IEC60115-1)
Temperature Coefficient	$\geq 20\Omega$ : $\pm 300\text{PPM}/^\circ\text{C}$ $< 20\Omega$ : $\pm 400\text{PPM}/^\circ\text{C}$	4.8 Natural resistance changes per temp. Degree centigrade $\frac{R_2 - R_1}{R_1(t_2 - t_1)} \times 10^6 \text{ (PPM}/^\circ\text{C)}$ R <sub>1</sub> : Resistance Value at room temperature (t <sub>1</sub> ) ; R <sub>2</sub> : Resistance at test temperature (t <sub>2</sub> ) t <sub>1</sub> : +25°C or specified room temperature t <sub>2</sub> : Test temperature (-55°C or 125°C)
Short-Time Overload	Resistance change rate is: $\pm(2\% + 0.05\Omega)\text{max.}$ With no evidence of mechanical damage.	4.13 Permanent resistance change after the application of a potential of 2.5 times rcwv for 5 seconds.
Terminal strength	No evidence of mechanical damage	4.16 Direct load: Resistance to a 2.5 kg direct load for 10 seconds in the direction of the longitudinal axis of the terminal leads. Twist test: Terminal leads shall be bent through 90° at a point of about 6mm from the body of the resistor and shall be rotated through 360° about the original axis of the bent terminal in alternating direction for a total of 3 rotations.
Resistance to soldering heat	Resistance change rate is: $\pm(5\% + 0.05\Omega)$ Max.. With no evidence of mechanical damage.	4.18 Permanent resistance change when leads immersed to a point 2.0-2.5mm from the body in 260°C $\pm 5^\circ\text{C}$ solder for 10 $\pm 1$ seconds.
Solderability	95% Coverage Min.	4.17 The area covered with a new, smooth, clean, shiny and continuous surface free from concentrated pinholes. Test temp. Of solder: 245°C $\pm 3^\circ\text{C}$ Dwell time in solder: 2~3 seconds.
Load life in humidity	Resistance change rate is: $\pm(5\% + 0.05\Omega)$ Max.. With no evidence of mechanical damage.	7.9 resistance change after 1,000 hours (1.5 hours "ON", 0.5 hour "OFF") at RCWV in a humidity test chamber controlled at 40°C $\pm 2^\circ\text{C}$ and 90 to 95% relative humidity.
Load life	Resistance change rate is: $\pm(5\% + 0.05\Omega)$ Max.. With no evidence of mechanical damage.	4.25.1 permanent resistance change after 1,000 hours operating at RCWV with duty cycle of 1.5 hours "ON", 0.5 hour "OFF" at 70°C $\pm 2^\circ\text{C}$ ambient.

Low Temperature Storage	Resistance change rate is:±(5%+0.05Ω Max.. With no evidence of mechanical damage.	IEC 60068-2-1 (Aa) Lower limit temperature , for 2H.
High Temperature Exposure	Resistance change rate is:±(5%+0.05Ω Max.. With no evidence of mechanical damage.	MIL-STD-202 108A Upper limit temperature , for 16H.
Rapid change of temperature	Resistance change rate is:±(2%+0.05Ω Max.. With no evidence of mechanical damage.	4.19 30 min at -55 °C and 30 min at 155°C; 100 cycles.

**9. Packing**


9.1 Tapes in Box Packing

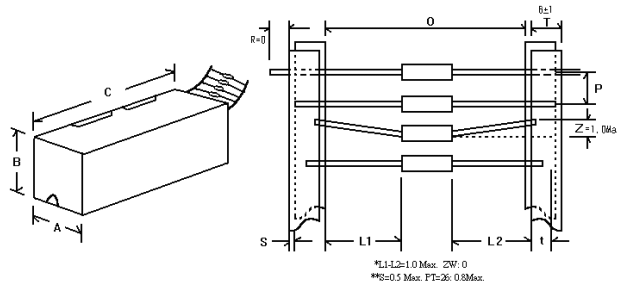

**Dimension of T/B (mm)**


Part No.	O	P	A±5	B±5	C±5	Qty/Box
KNPI 1/2W	52±1	5±0.3	75	45	255	1,000pcs
KNPI 1WS	52±1	5±0.3	75	45	255	1,000pcs
KNPI 1W	52±1	5±0.3	86	82	255	1,000pcs
KNPI 2WS	52±1	5±0.3	86	82	255	1,000pcs
KNPI 2W	64±5	10±0.5	90	119	255	1,000pcs
KNPI 3WS	64±5	10±0.5	90	119	255	1,000pcs
KNPI 3W	64±5	10±0.5	90	88	255	500pcs
KNPI 5WS	64±5	10±0.5	90	88	255	500pcs
KNPI 5W	90±5	10±0.5	115	124	500	500PCS
KNPI 7WS	90±5	10±0.5	115	124	500	500PCS

9.2 Tapes in Reel Packing

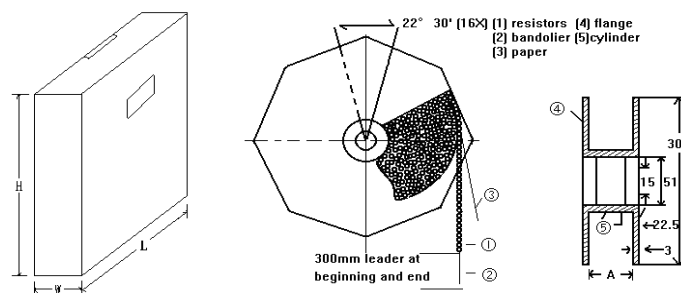

**Dimension of Reel (mm)**

Part No.	O	A	W±5	H±5	L±5	Qty/Box
KNPI 1/2W	52±1	73±2	85	295	293	2,500pcs
KNPI 1WS	52±1	73±2	85	295	293	2,500pcs
KNPI 1W	52±1	73±2	85	295	293	2,500pcs
KNPI 2WS	52±1	73±2	85	295	293	2,500pcs
KNPI 2W	64±5	80±5	95	295	293	1,000pcs
KNPI 3WS	64±5	80±5	95	295	293	1,000pcs
KNPI 3W	64±5	80±5	95	295	293	1,000pcs
KNPI 5WS	64±5	80±5	95	295	293	1,000pcs
KNPI 5W	90±5	115±5	121	310	310	700pcs
KNPI 7WS	90±5	115±5	121	310	310	700pcs

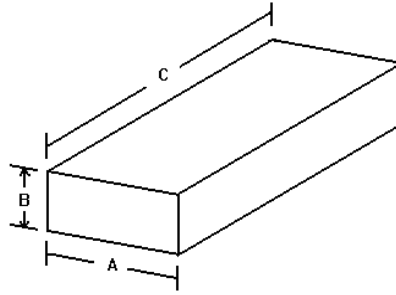**9.3 Bulk in Box Packing**

**Dimension of Box (mm)**

Part No.	A±5	B±5	C±5	Qty/Box
KNPI 1/2W	140	80	240	250/5,000pcs
KNPI 1WS	140	80	240	250/5,000pcs
KNPI 1W	140	80	240	100/2,500pcs
KNPI 2WS	140	80	240	100/2,500pcs
KNPI 2W	140	80	240	100/1,500pcs
KNPI 3WS	140	80	240	100/1,500pcs
KNPI 3W	140	80	240	100/1,000pcs
KNPI 5WS	140	80	240	100/1,000pcs
KNPI 5W	140	80	240	25/400pcs
KNPI 7WS	140	80	240	25/400pcs
KNPI 7W	140	80	240	25/300pcs
KNPI 8WS	140	80	240	25/300pcs
KNPI 8W	140	80	240	25/300pcs
KNPI 9WS	140	80	240	25/200pcs
KNPI 9W	140	80	240	25/200pcs
KNPI 10WS	140	80	240	25/200pcs

**10. Note**

- 10.1. UNI-ROYAL recommend products store in warehouse with temperature between 15 to 35°C under humidity between 25 to 75%RH. Even under storage conditions recommended above, solder ability of products will be degraded stored over 1 year old.
- 10.2. Cartons must be placed in correct direction which indicated on carton, otherwise the reel or wire will be deformed.
- 10.3. Storage conditions as below are inappropriate:
- Stored in high electrostatic environment
  - Stored in direct sunshine, rain, snow or condensation.
  - Exposed to sea wind or corrosive gases, such as Cl<sub>2</sub>, H<sub>2</sub>S, NH<sub>3</sub>, SO<sub>2</sub>, NO<sub>2</sub>, Br etc.

**11. Record**

Version	Description	Page	Date	Amended by	Checked by
1	First version	1~7	Mar.20, 2018	Haiyan Chen	Nana Chen
2	1.Modify the Derating Curve 2. Modify characteristic	5~6	Feb.23, 2019	Haiyan Chen	Yuhua Xu
3	Modify the product name code identity, "KNPN" changed to "KNPI"	1~7	Jun.12, 2020	Haiyan Chen	Yuhua Xu
4	Modify the size of 8W to 10WS wires from "0.75" to "1.00"	4	Mar.15, 2022	Haiyan Chen	Yuhua Xu
5	Modify the temperature coefficient test conditions	5	Oct.28, 2022	Haiyan Chen	Yuhua Xu

© Uniroyal Electronics Global Co., Ltd. All rights reserved. Specification herein will be changed at any time without prior notice