

# DATA SHEET

**Product Name**   **Power Metal Fixed Resistors**

---

**Part Name**   **PMR Series**

**File No.**   **DIP-SP-003**

## **Uniroyal Electronics Global Co., Ltd.**

88#, Longteng Road, Economic & Technical Development Zone, Kunshan, Jiangsu, China

Tel   +86 512 5763 1411 / 22 /33

Email   [marketing@uni-royal.cn](mailto:marketing@uni-royal.cn)

Manufacture Plant   Uniroyal Electronics Industry Co., Ltd.

Aeon Technology Corporation

Royal Electronic Factory (Thailand) Co., Ltd.

Royal Technology (Thailand) Co., Ltd.

## 1. Scope

- 1.1 This specification for approve relates Power Metal Fixed Resistors manufactured by UNI-ROYAL
- 1.2 High power in small body size
- 1.3 Excellent flame Retardant coating
- 1.4 High stability even in bad environment
- 1.5 Match the safety requirement
- 1.6 Compliant with RoHS directive.
- 1.7 Halogen free requirement.

## 2. Part No. System

The standard Part No. includes 14 digits with the following explanation:

- 2.1 Coated type, the 1<sup>st</sup> to 3<sup>rd</sup> digits are to indicate the product type and 4<sup>th</sup> digit is the special feature.

Example: PMR0= Power Metal Fixed Resistors

- 2.2 5<sup>th</sup>~6<sup>th</sup> digits:

- 2.2.1 This is to indicate the wattage or power rating. To dieting the size and the numbers,

The following codes are used; and please refer to the following chart for detail:

W=Normal Size “1”~“G”to denotes“1”~“16”as Hexadecimal:

1W~16W ( $\geq 1W$ )

| Wattage     | 1  | 2  | 3  |
|-------------|----|----|----|
| Normal Size | 1W | 2W | 3W |
| Small Size  | 1S | 2S | 3S |

- 2.2.2 For power of 1 watt to 16 watt, the 5<sup>th</sup> digit will be a number or a letter code and the 6<sup>th</sup> digit will be the letters of W, S or U.

Example: 1S=1WS; 3S=3WS

- 2.3 The 7<sup>th</sup> digit is to denote the Resistance Tolerance. The following letter code is to be used for indicating the standard Resistance Tolerance.

G=±2% J=±5%

- 2.4 The 8<sup>th</sup> to 11<sup>th</sup> digits is to denote the Resistance Value.

- 2.4.1 For the standard resistance values of E-24 series, the 8<sup>th</sup> digit is “0”, the 9<sup>th</sup> & 10<sup>th</sup> digits are to denote the significant figures of the resistance and the 11<sup>th</sup> digit is the number of zeros following;

For the standard resistance values of E-96 series, the 8<sup>th</sup> digit to the 10<sup>th</sup> digits is to denote the significant figures of the resistance and the 11<sup>th</sup> digit is the 11<sup>th</sup> digit is the zeros following.

- 2.4.2 The following number s and the letter codes are to be used to indicate the number of zeros in the 11<sup>th</sup> digit:

0=10<sup>0</sup> 1=10<sup>1</sup> 2=10<sup>2</sup> 3=10<sup>3</sup> 4=10<sup>4</sup> 5=10<sup>5</sup>  
6=10<sup>6</sup> J=10<sup>-1</sup> K=10<sup>-2</sup> L=10<sup>-3</sup> M=10<sup>-4</sup>

- 2.4.3 The 12<sup>th</sup>, 13<sup>th</sup> & 14<sup>th</sup> digits.

The 12<sup>th</sup> digit is to denote the Packaging Type with the following codes:

A=Tape/Box (Ammo pack) B=Bulk/Box

T=Tape/Reel P=Tape/Box of PT-26 products

- 2.4.4 The 13<sup>th</sup> digit is normally to indicate the Packing Quantity of Tape/Box packaging types. The following number is to be used for some packing quantities:


1=1000pcs 2=2000pcs 3=3000pcs 4=4000pcs 5=5000pcs

- 2.4.5 For some items, the 14<sup>th</sup> digit alone can use to denote special features of additional information with the following codes:

|                  |                 |                  |                    |
|------------------|-----------------|------------------|--------------------|
| 0=NIL            | P=Panasert type | 1=Avisert type 1 | 2=Avisert type 2   |
| 3=Avisert type 3 | 8=PT-58mm       | 9=PT-64mm        | 7=Lead wire(H)38mm |
| A=PT-83mm        | C=PT-73mm       | D=PT-71mm        |                    |


### 3. Ordering Procedure

(Example: PMR 2WS  $\pm 5\%$  39K $\Omega$  T/B-1000 )

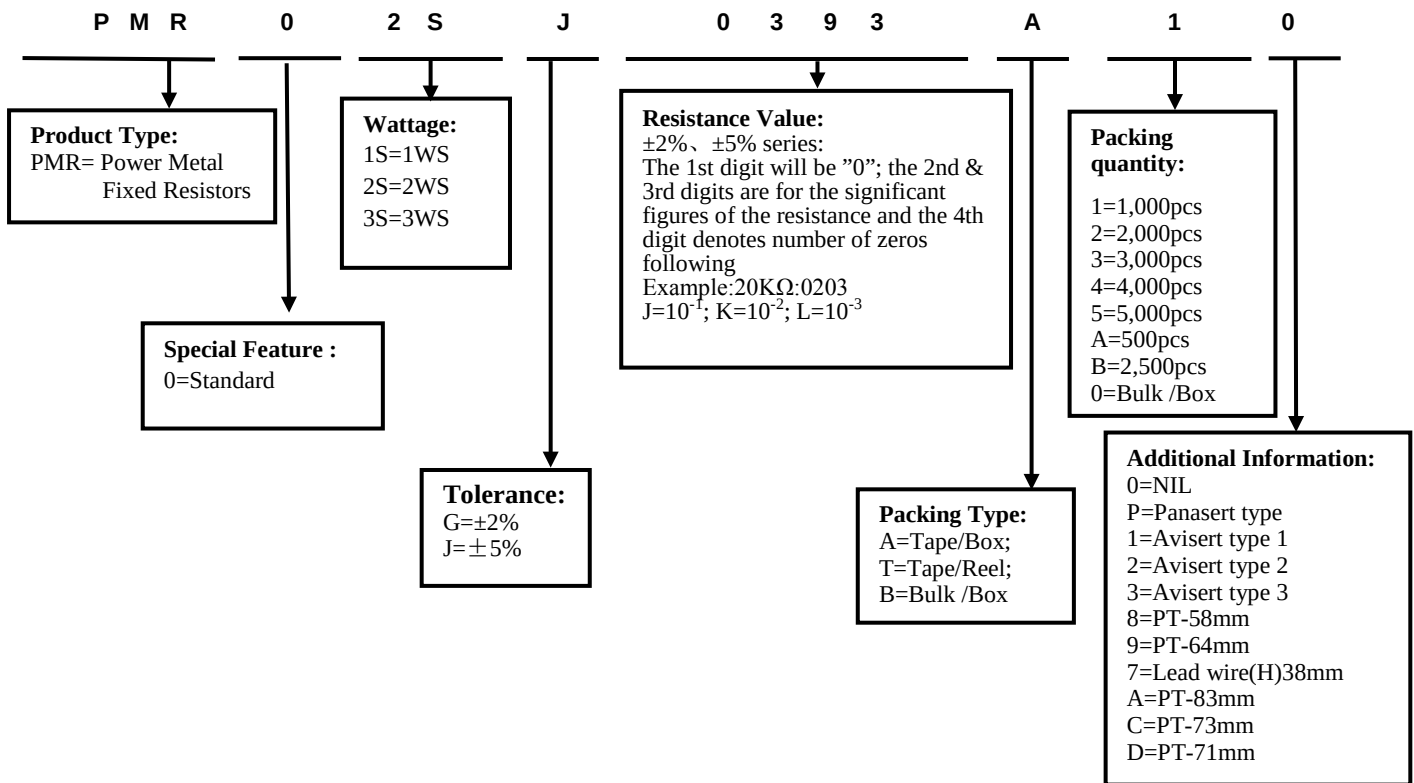

### 4. Marking

Resistors shall be marked with color coding , Colors shall be in accordance with JIS C 0802

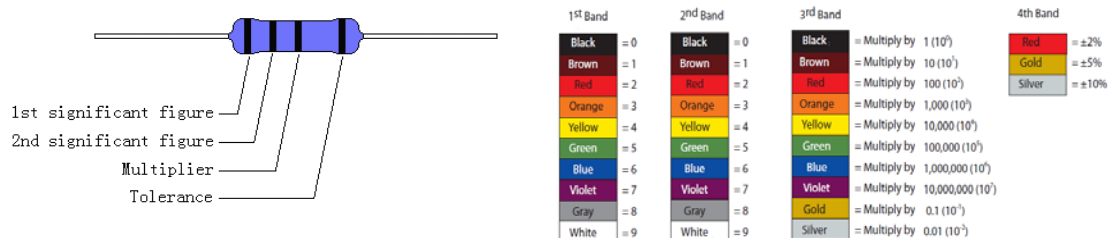

#### 4.1 Label:

Label shall be marked with following items:

- (1) Type and style
- (2) Nominal resistance
- (3) Resistance tolerance
- (4) Quantity
- (5) Lot number
- (6) PPM

Example:

| Power Metal Fixed Resistors |                  |
|-----------------------------|------------------|
| WATT: 1WS                   | VAL: 33 $\Omega$ |
| Q'TY: 5,000                 | TOL: 5%          |
| LOT: 7011248                | PPM:             |

## 5. Ratings & Dimension



| Type    | Dimension(mm) |      |      |    | PT | Max Working Voltage | Max Overload Voltage | Dielectric Withstanding Voltage | Tolerance | Resistance Range |
|---------|---------------|------|------|----|----|---------------------|----------------------|---------------------------------|-----------|------------------|
|         | D             | L    | d    | H  |    |                     |                      |                                 |           |                  |
| PMR 1WS | 2.2±0.5       | 6.5  | 0.54 | 28 | 52 | 350V                | 400V                 | 350V                            | ±2%、±5%   | 0.56Ω~1MΩ        |
| PMR 2WS | 4.0±0.6       | 11.5 | 0.70 | 25 | 52 | 500V                | 600V                 | 350V                            | ±2%、±5%   | 3.9Ω~680KΩ       |
| PMR 3WS | 5.0±0.6       | 15.5 | 0.75 | 28 | 64 | 750V                | 800V                 | 350V                            | ±2%、±5%   | 12Ω~180KΩ        |

## 6. Derating Curve

Power rating will change based on continuous load at ambient temperature from -55 to 155°C. It is constant between -55 to 70°C, and derate to zero when temperature rise from 70 to 155°C.

Voltage rating:


Resistors shall have a rated direct-current (DC) continuous working voltage or an approximate sine-wave root-mean-square (RMS) alternating-current (AC) continuous working voltage at commercial-line frequency and waveform corresponding to the power rating, as determined from the following formula:

$$RCWV = \sqrt{P \times R}$$


Remark: RCWV: Rating Continuous Working Voltage (Volt.) P: power rating (Watt) R: nominal resistance (Ω)

In no case shall the rated DC or RMS AC continuous working voltage be greater than the applicable maximum value.

The overload voltage is 2.5 times RCWV or Max. Overload voltage whichever is lower.



## 7. Structure

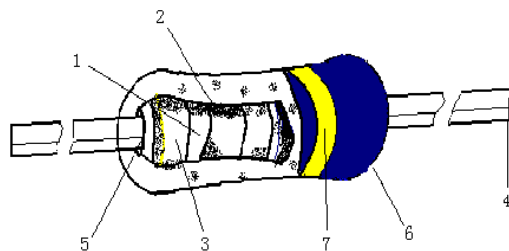

| No. | Name       | Material                        |
|-----|------------|---------------------------------|
| 1   | Basic body | Rod type ceramics               |
| 2   | Resistor   | Metal Film & Metal Oxide Film   |
| 3   | End cap    | Steel (Tin plated iron surface) |
| 4   | Lead wire  | Tin solder coated copper wire   |
| 5   | Joint      | By welding                      |
| 6   | Coating    | Insulated resin Color: Sea Blue |
| 7   | Color code | Epoxy resin                     |


## 8. Performance Specification

| Characteristic          | Limits |                                                                                | Test methods<br>(GB/T5729&JIS-C-5201&IEC60115-1)                                                                                                                                                                                                                                                                                                                                      |
|-------------------------|--------|--------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Temperature Coefficient | 1WS    | 0.56Ω~100KΩ: ±350 PPM/°C<br>101KΩ~470KΩ: ±400 PPM/°C<br>471KΩ~1MΩ: ±800 PPM/°C | 4.8 Natural resistance changes per temp. Degree centigrade<br>$\frac{R_2 - R_1}{R_1(t_2 - t_1)} \times 10^6$ (PPM/°C)<br>R <sub>1</sub> : Resistance Value at room temperature (t <sub>1</sub> ) ;<br>R <sub>2</sub> : Resistance at test temperature (t <sub>2</sub> )<br>t <sub>1</sub> : +25°C or specified room temperature<br>t <sub>2</sub> : Test temperature (-55°C or 125°C) |
|                         | 2WS    | 3.9Ω~100KΩ: ±350 PPM/°C<br>101KΩ~680KΩ: ±400 PPM/°C                            |                                                                                                                                                                                                                                                                                                                                                                                       |
|                         | 3WS    | 12Ω~100KΩ: ±350 PPM/°C<br>101KΩ~180KΩ: ±400 PPM/°C                             |                                                                                                                                                                                                                                                                                                                                                                                       |

|                              |                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Short-time overload          | $\Delta R/R \leq \pm(2\%+0.05 \Omega)$ , with no evidence of mechanical damage                                                                                                                           | 4.13 Permanent resistance change after the application of a potential of 2.5 times RCWV or Max. Overload Voltage whichever less or the max. Overload voltage respectively specified in the above list, whichever less for 5 seconds.                                                                                                                                                                                                                                         |
| Terminal strength            | Neither breakage of the lead wire nor loosening of termination                                                                                                                                           | 4.16 direct load:<br>Resistance to a 2.5 kg direct load for 10 seconds in the direction of the longitudinal axis of the terminal leads.<br>Twist test:<br>Terminal leads shall be bent through 90° at a point of about 6mm from the body of the resistor and shall be rotated through 360° about the original axis of the bent terminal in alternating direction for a total of 3 rotations.                                                                                 |
| Resistance to soldering heat | $\Delta R/R \leq \pm(1\%+0.05 \Omega)$ , with no evidence of mechanical damage                                                                                                                           | 4.18 Permanent resistance change when leads immersed to a point 2.0-2.5mm from the body in 260°C $\pm 5^\circ\text{C}$ , solder for 10 $\pm$ 1 seconds.                                                                                                                                                                                                                                                                                                                      |
| Solderability                | Coverage must be over 95%.                                                                                                                                                                               | 4.17 The area covered with a new, smooth, clean, shiny and continuous surface free from concentrated pinholes.<br>Test temp. of solder: 245°C $\pm 3^\circ\text{C}$<br>Dwell time in solder: 2~3seconds.                                                                                                                                                                                                                                                                     |
| Rapid change of temperature  | $\Delta R/R \leq \pm(2\%+0.05 \Omega)$ with no evidence of mechanical damage                                                                                                                             | 4.19 30 min at -55 °C and 30 min at 155°C; 100 cycles.                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Load life in humidity        | 1WS:<br>$\Delta R/R \leq \pm(5\%+0.05 \Omega)$ Max;<br>2WS&3WS:<br>$<100\text{K}\Omega: \Delta R/R \leq \pm(5\%+0.05 \Omega)$ Max<br>$\geq 100\text{K}\Omega: \Delta R/R \leq \pm(10\%+0.05 \Omega)$ Max | 7.9 Resistance changes after 1,000 hours operating at RCWV or Max. Overload Voltage whichever less with duty cycle of 1.5 hours “on”, 0.5 hour “off” in a humidity test chamber controlled at 40°C $\pm 2^\circ\text{C}$ and 90 - 95% relative humidity.                                                                                                                                                                                                                     |
| Load life                    | 1WS:<br>$\Delta R/R \leq \pm(5\%+0.05 \Omega)$ Max;<br>2WS&3WS:<br>$<100\text{K}\Omega: \Delta R/R \leq \pm(5\%+0.05 \Omega)$ Max<br>$\geq 100\text{K}\Omega: \Delta R/R \leq \pm(10\%+0.05 \Omega)$ Max | 4.25.1 Permanent resistance change after 1,000 hours operating at RCWV or Max. Working Voltage whichever less with duty cycle of 1.5 hours “on”, 0.5 hour “off” at 70°C $\pm 2^\circ\text{C}$ ambient.                                                                                                                                                                                                                                                                       |
| Flame retardant              | Resistor insulation is self-extinguishing within 10 seconds after externally applied flame is removed.                                                                                                   | 7.12 The burner is placed remote from resistor ignited and adjusted to produce a blue flame 38mm in height and a top of flame 127mm above the top of burner tube. Resistor is supported from its lead at 45° from the horizontal so that the lower end of resistor is the top of blue flame. The test flame is placed to remain for 15 seconds and removed for 15 seconds. The operation is to be repeated until resistor has been subjected to 5 application of test flame. |
| Low Temperature Storage      | 1WS:<br>$\Delta R/R \leq \pm(5\%+0.05 \Omega)$ Max;<br>2WS&3WS:<br>$<100\text{K}\Omega: \Delta R/R \leq \pm(5\%+0.05 \Omega)$ Max<br>$\geq 100\text{K}\Omega: \Delta R/R \leq \pm(10\%+0.05 \Omega)$ Max | IEC 60068-2-1 (Aa)<br>-55°C, for 2H.                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| High Temperature Exposure    | 1WS:<br>$\Delta R/R \leq \pm(5\%+0.05 \Omega)$ Max;<br>2WS&3WS:<br>$<100\text{K}\Omega: \Delta R/R \leq \pm(5\%+0.05 \Omega)$ Max<br>$\geq 100\text{K}\Omega: \Delta R/R \leq \pm(10\%+0.05 \Omega)$ Max | MIL-STD-202 108A<br>155°C, for 16H.                                                                                                                                                                                                                                                                                                                                                                                                                                          |

## 9. Packing


### 9.1 Tapes in Box Packing

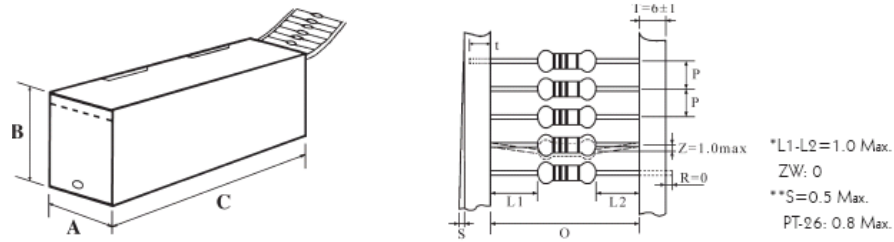

Dimension of T/B (mm)

| Part No. | O    | P      | A±5 | B±5 | C±5 | Qty/Box  |
|----------|------|--------|-----|-----|-----|----------|
| PMR 1WS  | 52±1 | 5±0.3  | 75  | 116 | 255 | 5,000pcs |
| PMR 2WS  | 52±1 | 5±0.3  | 80  | 82  | 255 | 1,000pcs |
| PMR 3WS  | 64±5 | 10±0.5 | 90  | 119 | 255 | 1,000pcs |


### 9.2 Tapes in Reel Packing

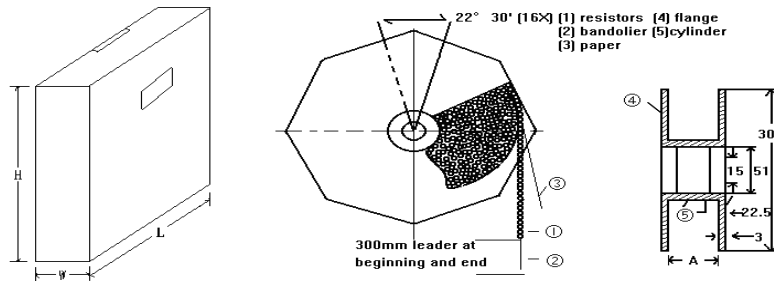

Dimension of Reel (mm)

| Part No. | O    | A    | W±5 | H±5 | L±5 | Qty/Box  |
|----------|------|------|-----|-----|-----|----------|
| PMR 1WS  | 52±1 | 73±2 | 85  | 294 | 293 | 5,000pcs |
| PMR 2WS  | 52±1 | 73±2 | 85  | 294 | 293 | 2,500pcs |
| PMR 3WS  | 64±5 | 80±5 | 95  | 294 | 293 | 1,000pcs |

### 9.3 Bulk in Box Packing

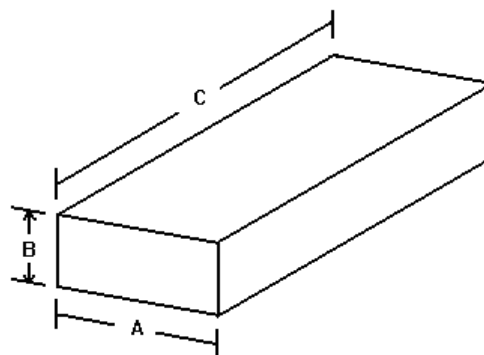

Dimension of Box (mm)

| Part No. | A±5 | B±5 | C±5 | Qty/Box       |
|----------|-----|-----|-----|---------------|
| PMR 1WS  | 140 | 80  | 240 | 500/10,000pcs |
| PMR 2WS  | 140 | 80  | 240 | 100/2,500pcs  |
| PMR 3WS  | 140 | 80  | 240 | 100/1,500pcs  |

## 10. Note

- 10.1. UNI-ROYAL recommend products store in warehouse with temperature between 15 to 35℃ under humidity between 25 to 75%RH.  
Even under storage conditions recommended above, solder ability of products will be degraded stored over 1 year old.
- 10.2. Cartons must be placed in correct direction which indicated on carton, otherwise the reel or wire will be deformed.
- 10.3. Storage conditions as below are inappropriate:
- Stored in high electrostatic environment
  - Stored in direct sunshine, rain, snow or condensation.
  - Exposed to sea wind or corrosive gases, such as Cl<sub>2</sub>, H<sub>2</sub>S, NH<sub>3</sub>, SO<sub>2</sub>, NO<sub>2</sub>, Br etc.

## 11. Record

| Version | Description                                                                                     | Page | Date         | Amended by  | Checked by |
|---------|-------------------------------------------------------------------------------------------------|------|--------------|-------------|------------|
| 1       | First version                                                                                   | 1~7  | Mar.20, 2018 | Haiyan Chen | Nana Chen  |
| 2       | Modify characteristic                                                                           | 5~6  | Feb.19, 2019 | Haiyan Chen | Yuhua Xu   |
| 3       | Modify 1WS Max Working Voltage, Max Overload Voltage, Resistance Range, Temperature Coefficient | 4    | Aug.07, 2020 | Haiyan Chen | Yuhua Xu   |
| 4       | Modify the temperature coefficient test conditions                                              | 4    | Oct.28, 2022 | Haiyan Chen | Yuhua Xu   |
| 5       | Modify the dimension                                                                            | 4    | Mar.25, 2024 | Haiyan Chen | Yuhua Xu   |
| 6       | Cancel the $\pm 1\%$ tolerance                                                                  | 1~7  | Aug.06, 2024 | Haiyan Chen | Yuhua Xu   |
| 7       | Modify the packaging size                                                                       | 6    | Jun.23, 2025 | Haiyan Chen | Yuhua Xu   |

© Uniroyal Electronics Global Co., Ltd. All rights reserved. Specification herein will be changed at any time without prior notice