

DATASHEET

Product Name **Flex Led Strip Use Thick Film Chip Resistors**

Part Name **LE05/LE06 Series**

File No. **SMD-SP-009**

Uniroyal Electronics Global Co., Ltd.

88#, Longteng Road, Economic & Technical Development Zone, Kunshan, Jiangsu, China

Tel +86 512 5763 1411 / 22 /33

Email marketing@uni-royal.cn

Manufacture Plant Uniroyal Electronics Industry Co., Ltd.

Aeon Technology Corporation

Royal Electronic Factory (Thailand) Co., Ltd.

Royal Technology (Thailand) Co., Ltd.

1. Scope:

- 1.1 This datasheet is the characteristics of Flex Led Strip Use Thick Film Chip Resistor manufactured by UNI-ROYAL.
- 1.2 Suit for reflow.
- 1.3 Stable electrical capability , high reliability.
- 1.4 Low assembly cost, suit for automatic SMT equipment
- 1.5 Superior mechanical strength and high frequency characteristics
- 1.6 Compliant with RoHS directive.
- 1.7 Halogen free requirement.

2. Part No. System

Part No. includes 14 codes shown as below:

2.1 1st~4th codes: Part name. E.g.: LE05、LE06

2.2 5th~6th codes: Power rating.

E.g.: W=Normal Size “1~G” = “1~16”

Wattage	1/4	1/8
Normal Size	W4	W8

If power rating is equal or lower than 1 watt, 5th code would be “W” and 6th code would be a number or letter.

E.g.: W8=1/8W W4=1/4W

2.3 7th code: Tolerance. E.g.: F=±1% J=±5%

2.4 8th~11th codes: Resistance Value.

2.4.1 If value belongs to standard value of E-24 series, the 8th code is zero, 9th~10th codes are the significant figures of resistance value, and the 11th code is the power of ten.

2.4.2 If value belongs to standard value of E-96 series, the 8th~10th codes are the significant figures of resistance value, and the 11th code is the power of ten.

2.4.3 11th codes listed as following:

0=10⁰ 1=10¹ 2=10² 3=10³ 4=10⁴ 5=10⁵ 6=10⁶ J=10⁻¹ K=10⁻² L=10⁻³ M=10⁻⁴

2.5 12th~14th codes.

2.5.1 12th code: Packaging Type. E.g.: T=Tape/Reel

2.5.2 13th code: Standard Packing Quantity.


5=5,000pcs D=20,000pcs

2.5.3 14th code: Special features.

E = Standard

3. Ordering Procedure

(Example: LE06 1/4W ±5% 100Ω T/R-5000)

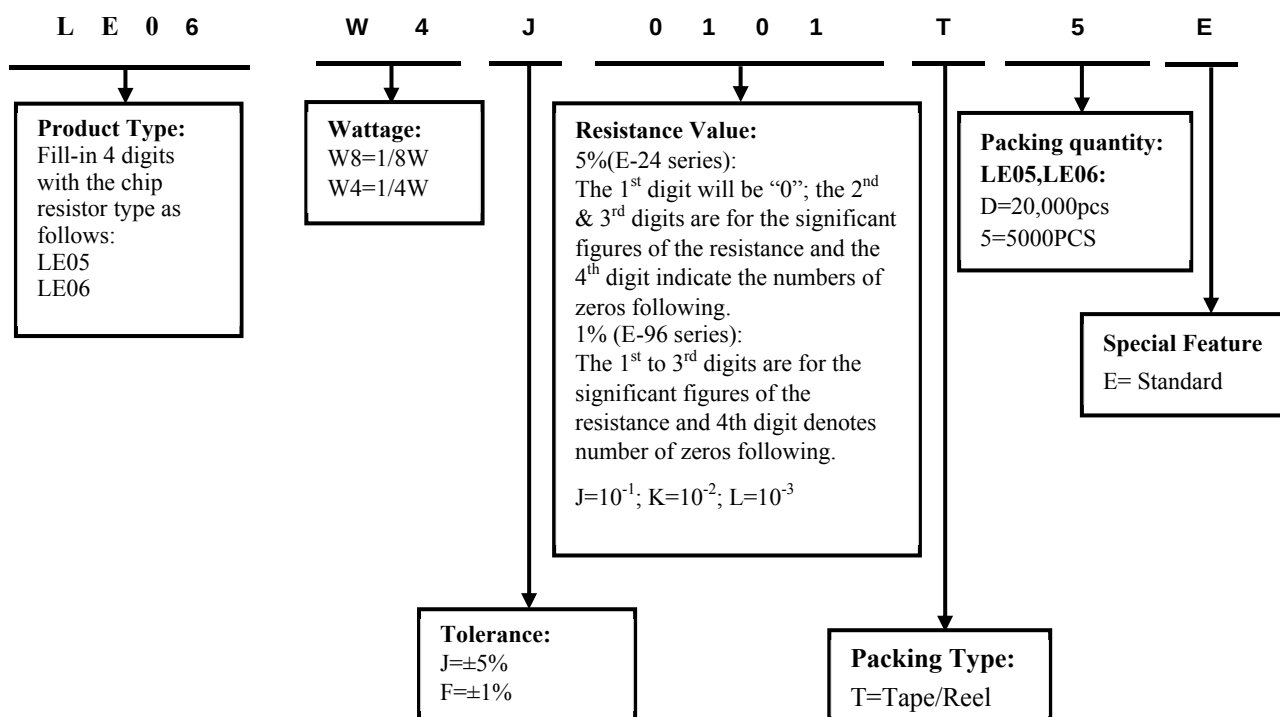


4. Marking

4.1 $\pm 5\%$ tolerance products (E-24 series):

3 codes.

1st~2nd codes are the significant figures of resistance value,
and the rest code is the power of ten




201 $\rightarrow$ 200 Ω

4.2 $\pm 1\%$ tolerance products (E-96 series):

4 codes.


1st~3rd codes are the significant figures of resistance value,
and the rest code is the power of ten.

Letter "R" in mark means decimal point.



1000 $\rightarrow$ 100 Ω

5. Dimension

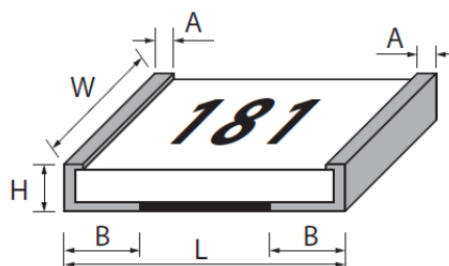


Type	Dimension(mm)				
	L	W	H	A1	B1
LE05(0805)	2.00 $\pm$ 0.15	1.25 +0.15/-0.10	0.55 $\pm$ 0.10	$\leq$ 1.0	0.40 $\pm$ 0.20
LE06(1206)	3.10 $\pm$ 0.15	1.55 +0.15/-0.10	0.55 $\pm$ 0.10	$\leq$ 1.0	0.50 $\pm$ 0.20


6. Resistance Range

Type	Power Rating	Max Working Voltage	Max Overload Voltage	Tolerance	Resistance Range
LE05	1/8W	200V	400V	$\pm 1\%, \pm 5\%$	10 Ω ~3.3K Ω
LE06	1/4W	200V	400V	$\pm 1\%, \pm 5\%$	10 Ω ~2.7K Ω

7. Structure

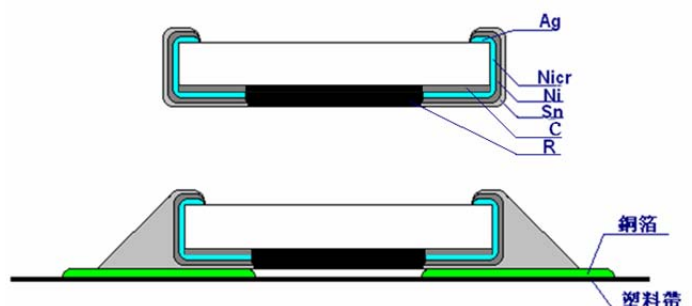

8. Recommend the size of welding plate

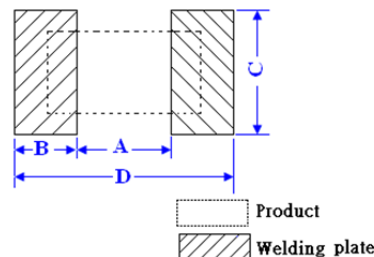


Type	Dimension(mm)			
	A	B	C	D
LE05	1.0±0.1	1.0±0.1	1.3±0.1	3.0±0.1
LE06	2.0±0.1	1.1±0.1	1.6±0.1	4.2±0.1

9. Derating Curve

Power rating will change based on continuous load at ambient temperature from -55 to 155°C.

It is constant between -55 to 70°C, and derate to zero when temperature rise from 70 to 155°C.

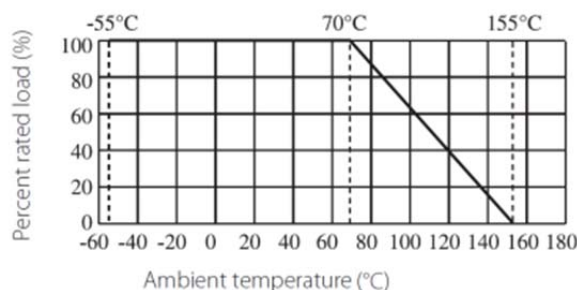

Voltage rating:

Resistors shall have a rated direct-current (DC) continuous working voltage or an approximate sine-wave root-mean-square (RMS) alternating-current (AC) continuous working voltage at commercial-line frequency and waveform corresponding to the power rating, as determined from the following formula:

$$RCWV = \sqrt{P \times R}$$

Remark: RCWV: Rating Continuous Working Voltage (Volt.) P: power rating (Watt) R: nominal resistance (Ω)

In no case, Shall the rated DC or RMS AC continuous working voltage be greater than the applicable maximum value.

The overload voltage is 2.5 times RCWV or Max. Overload voltage whichever is lower.

10. Performance Specification


Characteristic	Limits		Test Methods (GB/T5729&JIS-C-5201&IEC60115-1)
Temperature Coefficient	±200ppm/°C		4.8 Natural resistance changes per temp. Degree centigrade $\frac{R_2 - R_1}{R_1(t_2 - t_1)} \times 10^6 \text{ (ppm/°C)}$ R ₁ : Resistance Value at room temperature (t ₁) ; R ₂ : Resistance at test temperature (t ₂) t ₁ : +25°C or specified room temperature t ₂ : Test temperature (-55°C or 125°C)
Short-time overload	±1%	±(1.0%+0.1Ω)	4.13 Permanent resistance change after the application of a potential of 2.5 times RCWV or Max. Overload Voltage whichever less for 5 seconds.
	±5%	±(2.0%+0.1Ω)	
Dielectric withstanding voltage	No evidence of flashover mechanical damage, arcing or insulation breaks down.		4.7 Resistors shall be clamped in the trough of a 90° metallic v-block and shall be tested at ac potential respectively specified in the given list of each product type for 60-70 seconds.
Solderability	Coverage must be over 95%.		4.17 The area covered with a new, smooth, clean, shiny and continuous surface free from concentrated pinholes. Temperature of solder: 245±3°C; Dwell time in solder: 2~3 seconds.

Rapid change of temperature	$\pm 1\%$	$\pm(1.0\%+0.1\Omega)$	4.19 30 min at lower limit temperature and 30 min at upper limit temperature , 100 cycles.
	$\pm 5\%$	$\pm(3.0\%+0.1\Omega)$	
Soldering heat	Resistance change rate must be in $\pm(1\%+0.005\Omega)$		4.18 Dip the resistor into a solder bath having a temperature of $260^{\circ}\text{C}\pm 5^{\circ}\text{C}$ and hold it for 10 ± 1 seconds.
Terminal bending	After electricity, the lamp is not bright		The interception length is a soft light band of 12 resistors, and the force of 0.5kg on the $\Phi 30\text{mm}$ PVC pipe is coiled and reversed five times
Insulation resistance	$\geq 1,000 \text{ M}\Omega$		4.6 The measuring voltage shall be ,measured with a direct voltage of $(100\pm 15)\text{V}$ or a voltage equal to the dielectric withstanding voltage., and apply for 1min.
Humidity (steady state)	$\pm 1\%$	$\pm(0.5\%+0.1\Omega)$	4.24 Temporary resistance change after 240 hours exposure in a humidity test chamber controlled at $40\pm 2^{\circ}\text{C}$ and 90-95% relative humidity,
	$\pm 5\%$	$\pm(3.0\%+0.1\Omega)$	
Load life in humidity	$\pm 1\%$	$\pm(1.0\%+0.05\Omega)$	7.9 Resistance change after 1000 hours (1.5hours “ON” , 0.5hours “OFF”) at RCWV or Max. Working Voltage whichever less in a humidity test chamber controlled at $40\pm 2^{\circ}\text{C}$ and $93\%\pm 3\% \text{ RH}$.
	$\pm 5\%$	$\pm(3.0\%+0.05\Omega)$	
Load life	$\pm 1\%$	$\pm(1.0\%+0.1\Omega)$	4.25.1 Permanent Resistance change after 1000 hours operating at RCWV or Max. Working Voltage whichever less with duty cycle of 1.5 hours “ON” , 0.5 hour “OFF” at $70\pm 2^{\circ}\text{C}$ ambient.
	$\pm 5\%$	$\pm(3.0\%+0.1\Omega)$	
Low Temperature Storage	$\pm 1\%$	$\pm(1.0\%+0.1\Omega)$	IEC 60068-2-1 (Aa) Lower limit temperature , for 2H.
	$\pm 5\%$	$\pm(3.0\%+0.1\Omega)$	
High Temperature Exposure	$\pm 0\%$	$\pm(1.0\%+0.1\Omega)$	MIL-STD-202 108A Upper limit temperature , for 1000H.
	$\pm 5\%$	$\pm(3.0\%+0.1\Omega)$	
Leaching	No visible damage		J-STD-002 Test D Samples completely immersed for 30 sec in solder bath at 260°C

11. Soldering Condition

(This is for recommendation, please customer perform adjustment according to actual application)

11.1 Recommend Reflow Soldering Profile : (solder : Sn96.5 / Ag3 / Cu0.5)

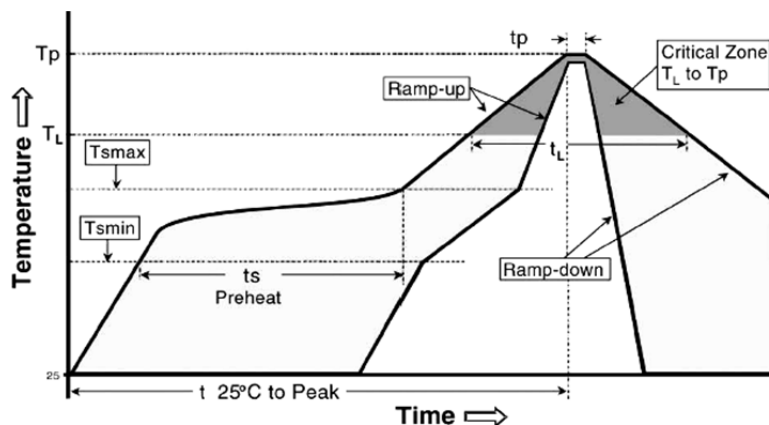


Profile Feature	Lead (Pb)-Free solder
Preheat: Temperature Min (T_{smin}) Temperature Max (T_{smax}) Time (T_{smin} to T_{smax}) (t_s)	150°C 200°C 60 -120seconds
Average ramp-up rate : (T_{smax} to T_p)	3°C / second max.
Time maintained above : Temperature (T_L) Time (t_L)	217°C 60-150 seconds
Peak Temperature (T_p)	260°C
Time within $+0^{\circ}\text{C}$ of actual peak Temperature (t_p) -5°C	10 seconds
Ramp-down Rate	6°C/second max.
Time 25°C to Peak Temperature	8minutes max.

Allowed Re-flow times : 2 times


Remark : To avoid discoloration phenomena of chip on terminal electrodes, we suggest use N_2 Re-flow furnace .

11.2 Recommend Wave Soldering Profile : (Apply to 0603 and above size)

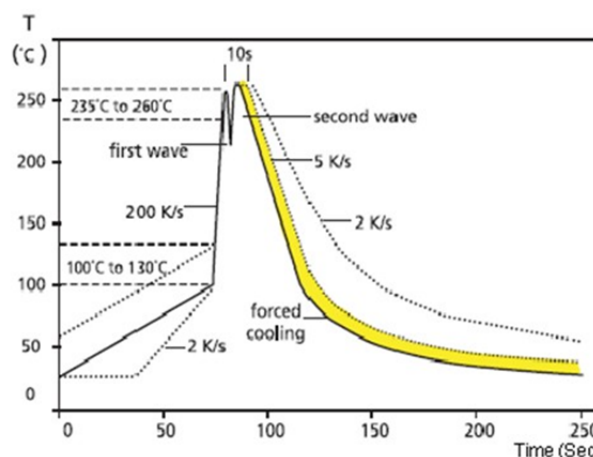


12. Packing of Surface Mount Resistors

12.1 Dimension of Paper Taping : (Unit: mm)

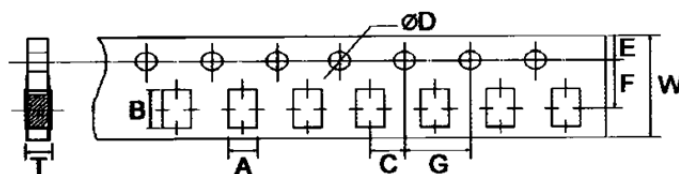

Type	A ±0.2	B ±0.2	C ±0.05	$\Phi D^{+0.1}_{-0}$	E ±0.1	F ±0.05	G ±0.1	W ±0.2	T ±0.1
LE05	1.65	2.40	2.00	1.50	1.75	3.50	4.00	8.00	0.81
LE06	2.00	3.60	2.00	1.50	1.75	3.50	4.00	8.00	0.81

12.2 Dimension of Reel : (Unit: mm)

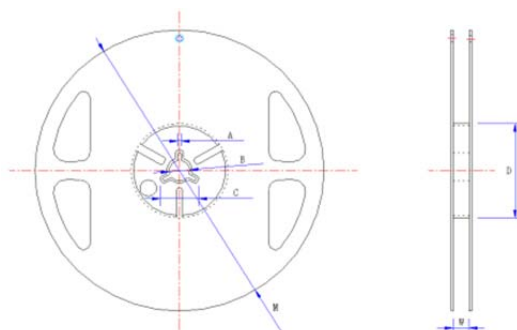

Type	Taping	Qty/Reel	A±0.5	B±0.5	C±0.5	D±1	M±2	W±1
LE05	Paper	5,000pcs	2.0	13.0	21.0	60.0	178.0	10.0
LE06	Paper	5,000pcs	2.0	13.0	21.0	60.0	178.0	10.0
LE05	Paper	2,0000pcs	2.0	13.0	21.0	96.0	330.0	10.0
LE06	Paper	2,0000pcs	2.0	13.0	21.0	96.0	330.0	10.0

13. Note

- 13.1. UNI-ROYAL recommend products store in warehouse with temperature between 15 to 35°C under humidity between 25 to 75%RH.
Even under storage conditions recommended above, solder ability of products will be degraded stored over 1 year old.
- 13.2. Cartons must be placed in correct direction which indicated on carton, otherwise the reel or wire will be deformed.
- 13.3. Storage conditions as below are inappropriate:
 - a. Stored in high electrostatic environment
 - b. Stored in direct sunshine, rain, snow or condensation.
 - c. Exposed to sea wind or corrosive gases, such as Cl₂, H₂S, NH₃, SO₂, NO₂, Br etc.

14. Record

Version	Description	Page	Date	Amended by	Checked by
1	First version	1~6	Mar.20, 2018	Haiyan Chen	Nana Chen
2	Modify characteristic	4~5	Feb.12, 2019	Haiyan Chen	Yuhua Xu
3	Modify the High Temperature Exposure conditions	7	July.29, 2019	Haiyan Chen	Yuhua Xu
4	Extend the resistance range of LE06	3	Sep.11, 2019	Haiyan Chen	Yuhua Xu
5	Extend the resistance range of LE06	3	Sep.23, 2019	Haiyan Chen	Yuhua Xu
6	Modify the reflow curve and add the wave soldering curve	5~6	Apr.29, 2020	Haiyan Chen	Yuhua Xu
7	Modify the resistance range Add the dimension of Reel	3	Oct.27,2020	Song Nie	Yuhua Xu
8	Modify the temperature coefficient test conditions	4	Oct.26, 2022	Haiyan Chen	Yuhua Xu

© Uniroyal Electronics Global Co., Ltd. All rights reserved. Specification herein will be changed at any time without prior notice.