
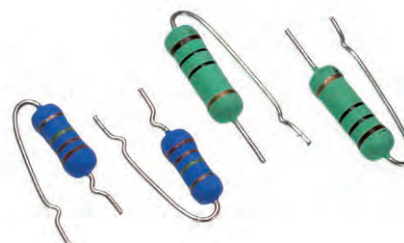



F Forming Type (F 型)

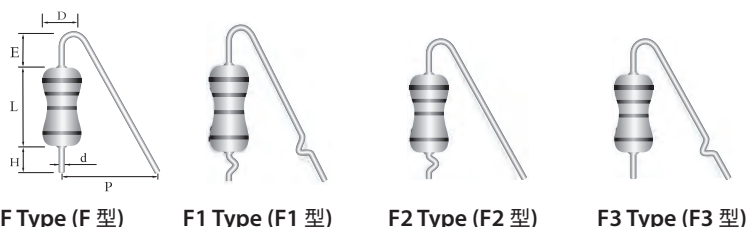

Dimension (尺寸) (mm)

Power Rating 额定功率	L Max. L 最大	D Max. D 最大	d ±0.05	P ⁺¹ -3	H ±1	E ±0.5
1W (2W-S)	12.5	5.1	0.70	6~9	4.5~20	2.5
2W (3W-S)	16.5	6.5	0.70	5~11	3~10	2.5
3W (5W-S)	18.5	7.5	0.75	5~8.5	3	2.5


M Forming Type (M 型)

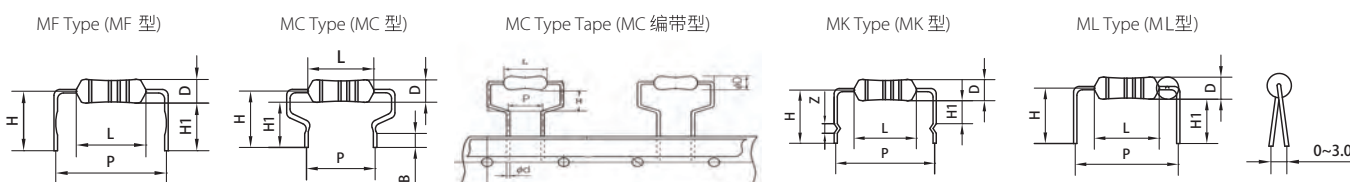

Power Rating 额定功率	L(Max)	D(Max)	d±0.05	H±2	P±1.5
1/2W & 1WS	10.5	4.1	0.70	9~17.5	12.5~39.4
1W & 2WS	12.5	5.1	0.70	9~14	12.5~39.4
2W & 3W-S	16.5	6.5	0.70	9~18	17.5~25
2W & 3W-S(MC编带型)	16.5	6.5	0.70	9~13	7.5~10
3W & 5WS	18.5	7.5	0.75	9~20	17.5~31
5W(7WS)	26	9.5	0.75	11~20	31~35

T Forming Type (T 型)

Power Rating 额定功率	L(Max)	D(Max)	d±0.05	P(Max)	H ⁺¹ -0
1W-S	10.5	4.1	0.70	12.5	8
1W(2W-S)	12.5	5.1	0.70	15	8
2W(3W-S)	16.5	6.5	0.70	20	9

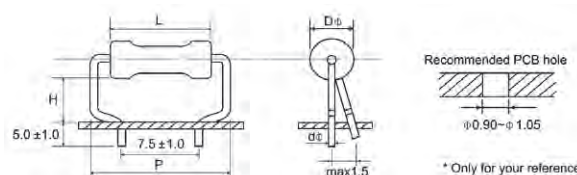

Ordering Procedure (Example: MOR1WS 5% 10Ω B/B M Type with flattened lead wire)

订购方式 (例如: MOR1WS 5% 10Ω B/B M 型导线打扁)

M	O	R	0	1	S	J	0	1	0	0	B	M	F	
Product Type (产品类型): MOR=Metal Oxide Film Fixed Resistors (金属氧化膜固定电阻器) CFR=Carbon Film Fixed Resistors (碳膜固定电阻器)			Special Feature (特征): 0=Standard(标准品) I=Non-Inductive(无感型)		Wattage (功率): W2=1/2W 1W=1W 2W=2W 3W=3W 5W=5W 15=1W-S 25=2W-S 35=3W-S 5W=5W-S		Tolerance (公差): G=2% J=±5% K=±10%		Resistance Value (阻值): 5% & 10% (E-24 series): the 1 st digit is "0"; the 2 nd & 3 rd digits are for the significant figures of the resistance and the 4 th digits or letter indicate the number of zeros; 5%,10% 产品 (E-24 系列阻值): 第 1 位是 0, 第 2、3 位表示阻值的有效数, 第 4 位表示有几个 0. 2% (E-96 series): the 1 st to 3 rd digits are for the significant figures of the resistance and the 4 th digits or letter indicate the number of zeros. 2% 产品 (E-96 系列阻值): 第 1~3 位表示阻值的有效数, 第 4 位表示有几个 0.		Packing Type(包装类型): B=Bulk/Box (散装 / 盒装) A=Tape/Box (编带 / 盒装)		Additional Information(注): F0=F Type (F 型) F1=F1 Type (F1 型) F2=F2 Type (F2 型) F3=F3 Type (F3 型) T0=T Type (T 型) MF=M Type with flattened lead wire M 型导线打扁 MC=M Type with bending lead wire M 型导线打弯曲 MK=M Type with kinked lead wire M 型导线打弯折 ML=M Type with normal lead wire M 型导线直线 TZ=Axial type 套管轴向型 TF=F Processing-type 套管F加工型 TM=M Processing-type 套管M加工型	

Remark: For more details, please check page 198, Part No. System. 注: 更多细节详见P198标准料号系统。