



# DATASHEET

**Product Name** Cemented wire wound tubular fixed resistors

**Part Name** GRM1 500W  $\pm 5\%$  22  $\Omega$

**Part No.** GRM100J0220500

**File No.** DIP-SP-093

## Uniroyal Electronics Global Co., Ltd.

88#, Longteng Road, Economic & Technical Development Zone, Kunshan, Jiangsu, China

Tel +86 512 5763 1411 / 22 /33

Email [marketing@uni-royal.cn](mailto:marketing@uni-royal.cn)

Manufacture Plant Uniroyal Electronics Industry Co., Ltd.

Aeon Technology Corporation

Royal Electronic Factory (Thailand) Co., Ltd.

Royal Technology (Thailand) Co., Ltd.

## 1. Scope

1.1 This datasheet is the characteristics of Cemented wire wound tubular fixed resistors manufactured by UNI-ROYAL.

## 2. Part No. System

The standard Part No. includes 14 digits with the following explanation:

2.1 The 1<sup>st</sup> to 4<sup>rd</sup> digits are to indicate the product type.

Example: GRM1= GRM1

2.2 5<sup>th</sup>~6<sup>th</sup> digits:

2.2.1 For power rating of 100W and over, the 5<sup>th</sup> & the 6<sup>th</sup> digits will be indicated with “00” and the actual wattage being indicated at the last 3 digits (12<sup>th</sup>~14<sup>th</sup>) of the part No.

2.3 The 7<sup>th</sup> digit is to denote the Resistance Tolerance. The following letter code is to be used for indicating the standard Resistance Tolerance.

J=±5%

2.4 The 8<sup>th</sup> to 11th digits is to denote the Resistance Value.

2.4.1 For the standard resistance values of E-24 series, the 8<sup>th</sup> digit is “0”, the 9<sup>th</sup> & 10<sup>th</sup> digit are to denote the significant figures of the resistance and the 11<sup>th</sup> digit is the numbers of zeros following.

Example:

0220=22Ω


2.5 The 12<sup>th</sup>, 13<sup>th</sup> & 14<sup>th</sup> digits.

2.5.1 for power rating over 100 watt, please indicate the power rating at the last 3 digits of the part no.

Example: 500=500W

## 3. Ordering Procedure


(Example: GRM1 500W 5% 22Ω B/B )

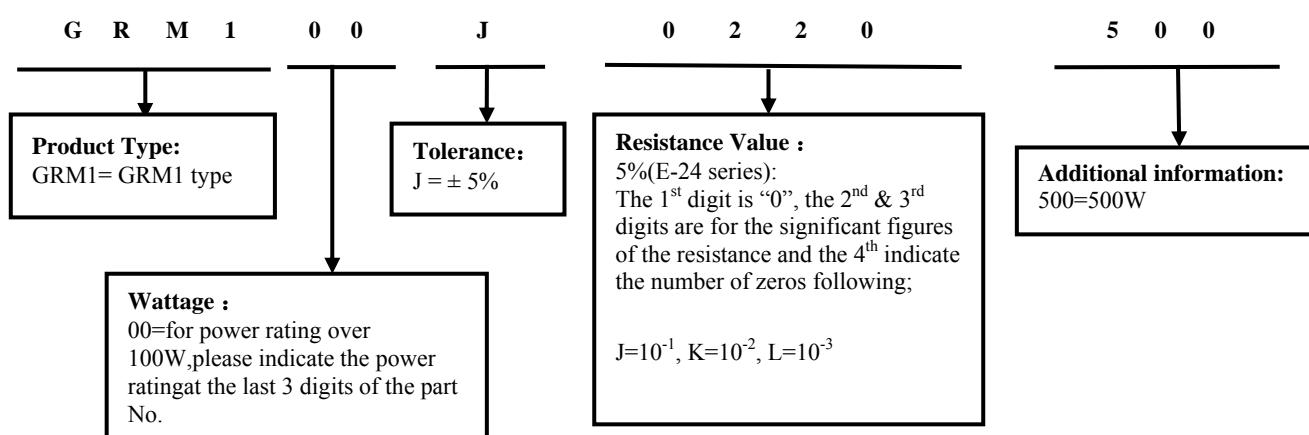

## 4. Rating

Type	Power (25°C)	Tolerance	Resistance	Max Working Voltage	Operating Temperature
GRM1	500W	±5%	22 Ω	104V	-55~+275°C


## 5. Dimension

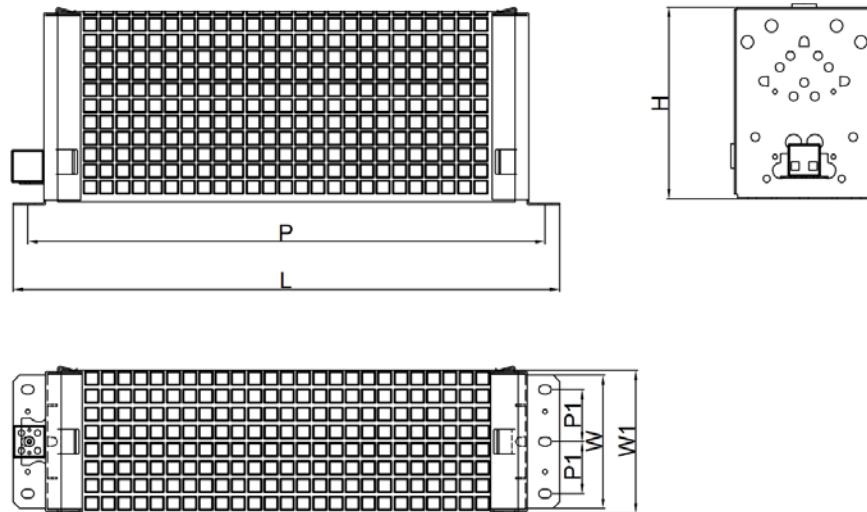

Unit : mm

Type	L±2	P±2	W±1	W1±1	H±1	P1±1
GRM1	341	323	82	88	118	32

## 6. Derating Curve

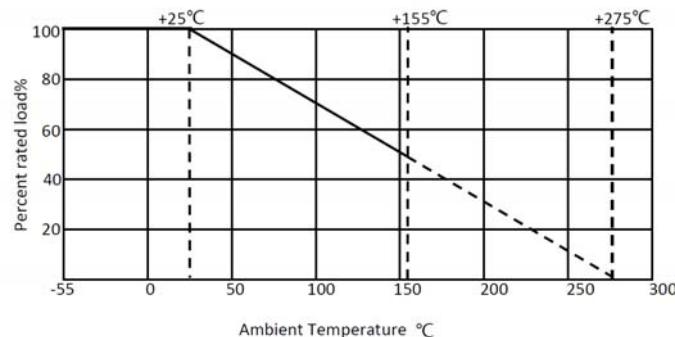

**7. Performance Specification**

Characteristic	Limits	Test method (GB/T 5729&JIS-C-5201&IEC60115-1)
Temperature Coefficient	±350 PPM/°C	4.8 Natural resistance changes per temp. Degree centigrade $\frac{R_2-R_1}{R_1(t_2-t_1)} \times 10^6 \text{ (PPM/°C)}$ R <sub>1</sub> : Resistance value at room temperature R <sub>2</sub> : Resistance value at room temperature +100°C t <sub>1</sub> : Room temperature t <sub>2</sub> : Room temperature +100°C
Short-time overload	Resistance change rate is: ±(5%+0.05Ω)Max. With no evidence of mechanical damage.	4.13 Permanent resistance change after the application of a potential of 2.5 times RCWV or Max. Overload Voltage whichever less for 5 seconds.
Rapid change of temperature	Δ R/R ≤ ±(5%+0.05 Ω) with no evidence of mechanical damage	4.19 30 min at -55 °C and 30 min at 155°C; 100 cycles.
Load life	Δ R/R ≤ ±(5%+0.05 Ω) with no evidence of mechanical damage	4.25.1 Permanent resistance change after 1,000 hours operating at RCWV with duty cycle 1.5 hours “ON”, 0.5 hour “OFF” at 25°C±2°C ambient.

**8. Note**

8.1. UNI-ROYAL recommend products store in warehouse with temperature between 15 to 35°C under humidity between 25 to 75%RH.  
Even under storage conditions recommended above, solder ability of products will be degraded stored over 1 year old.

8.2. Cartons must be placed in correct direction which indicated on carton, otherwise the reel or wire will be deformed.

8.3. Storage conditions as below are inappropriate:

- Stored in high electrostatic environment
- Stored in direct sunshine, rain, snow or condensation.
- Exposed to sea wind or corrosive gases, such as Cl<sub>2</sub>, H<sub>2</sub>S, NH<sub>3</sub>, SO<sub>2</sub>, NO<sub>2</sub>, etc.

**9. Record**

Version	Description	Page	Date	Amended by	Checked by
1	First version	1~4	Jul.11, 2023	Haiyan Chen	Yuhua Xu
2	Modify the dimension	3	Apr.02, 2024	Haiyan Chen	Yuhua Xu

© Uniroyal Electronics Global Co., Ltd. All rights reserved. Specification herein will be changed at any time without prior notice